


Aluminium 100x55mm Rectangle Downpipes



Roof Pitch	Maximum Roof Area served per downpipe (m ²)
0° - 25°	100
25° - 35°	80
35° - 45°	70
45° - 55°	60

Aluminium 100x55mm downpipes add the finishing touch to your installation. These pipes are powdercoated so colours from all of the ranges in our colour chart are available. Aluminium is a great option for coastal environments. The standard bends are 95 degrees. Spreaders as per the photo below are also available in applications where higher level roofs need to discharge water onto lower level roofs. T Junctions are also available where 2 or more downpipes need to be linked together to discharge to a single drain. Bends, joiners, spreaders and junctions all utilise cast aluminium fittings that are powdercoated to match the colour of the downpipe. Fixing is done with holderbatts which offer flexibility when varying offsets from the cladding are needed.

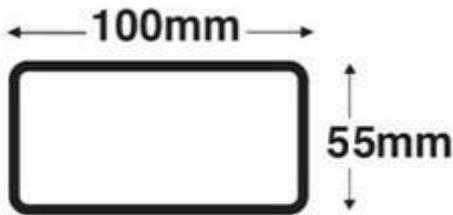

Downpipe T and L Spreader

Holderbatts - Manufactured in aluminium then powdercoated to match the downpipe colour. Holderbatts offer angular and horizontal adjustment (40-70mm), ideal for installation against weather boards or with narrow soffits where a variable offset from the wall is required.



Components



95 degree bend



Joining Socket