


# Coloursteel 80mm Downpipes



Roof Pitch	Roof plane area served by the downpipe (m <sup>2</sup> )
0° - 25°	85
25° - 35°	70
35° - 45°	60
45° - 55°	50


Coloursteel 80mm downpipes add the finishing touch to your installation. Coloursteel downpipes are available in a wide range of colours and these are detailed in our colour chart. The standard bends are 95 degrees and 30 degrees but custom angles can be done by hand mitring the pipes. L or T spreaders as per the photo below are also available in applications where higher level roofs need to discharge water onto lower level roofs. T Junctions are also available where 2 or more downpipes need to be linked together to discharge to a single drain. Bends, joiners, spreaders and junctions all utilise cast aluminium fittings that are powdercoated to match the colour of the downpipe. There are 2 fixing options available. Downpipe clips are suitable for most installations. Alternatively munzing rings offer greater flexibility when varying offsets from the cladding are needed or an alternative look is required. Both of these options are detailed below.

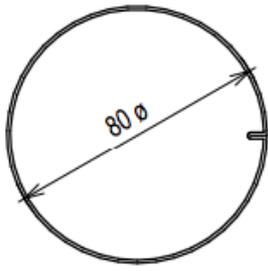

Downpipe T and L Spreader

## Fixing Options

**Downpipe Clip** - This is the standard fixing system which is a cost effective method. Clips are manufactured in aluminium and powdercoated to match the downpipe colour.

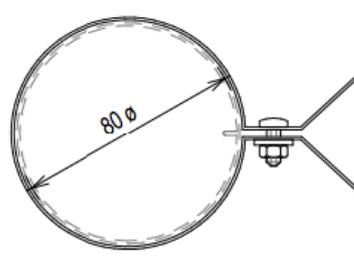

**Munzing Rings** - Manufactured in aluminium then powdercoated to match the downpipe colour. Munzing rings are ideal for installations against weatherboards or with narrow soffits where a variable offset from the wall is required. The length of the threaded rod is cut to suit the offset of the pipe from the wall.

